


Energy Distribution

single phase Zero-U Power Distribution Units (PDU)

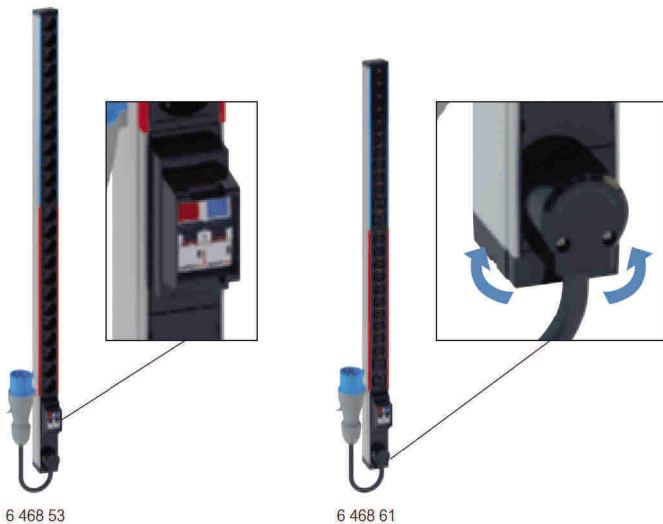

Technical characteristics p. 17-19

To provide ~ electric power for IT equipments in 19" enclosures
 Single phase 230 V - 50/60 Hz power supply
 Zero-U PDU for vertical mounting in the cabinet (see p. 18-19 for dimensions)
 PDU with 2 circuits protected by 16 A uni+neutral MCB in a support with projecting edges to avoid accidental breakdown
 Each circuit is identified by color coding
 The total number of outlets is distributed equally between the 2 circuits
 330° rotating cable input for a perfect orientation of the cable and no interference in the cabinet
 2P+E outlets:
 - C13 and C19 standard outlets are equipped with cord locking system to avoid any accidental disconnection. Universal solution compatible with all the cords (C14 plugs for C13 and C20 plugs for C19)
 - French, German and British standard outlets are equipped with shutters
 - French and German standard outlets are inclined at 55°
 Delivered with 2 sets of metallic mounting brackets (see details p. 18-19):
 - Button brackets. For quick fixing and variable pitch
 - Standard brackets. For screw fixing
 Black modules (outlets and functions). Aluminium profile

Pack	Cat.Nos	Standard
1	6 468 52	German standard 24 outlets Connection on terminal block up to 6 mm ²
1	6 468 53	24 outlets 3 m power supply cord with IEC 60309 32 A 2P+E plug
1	6 468 54	British standard 24 outlets Connection on terminal block up to 6 mm ²
1	6 468 50	French standard 24 outlets Connection on terminal block up to 6 mm ²
1	6 468 51	24 outlets 3 m power supply cord with IEC 60309 32 A 2P+E plug
1	6 468 56	IEC 60320 standard 24 C13 outlets with cord locking system Connection on terminal block up to 6 mm ²
1	6 468 57	24 C13 outlets with cord locking system 3 m power supply cord with IEC 60309 32 A 2P+E plug
1	6 468 60	20 C13 outlets + 4 C19 outlets with cord locking system. Connection on terminal block up to 6 mm ²
1	6 468 61	20 C13 outlets + 4 C19 outlets with cord locking system. 3 m power supply cord with IEC 60309 32 A 2P+E plug
1	6 468 65	With ammeter Measure consumption to provide better installation management: balancing circuits, displaying available capacity, preventing overloads and power failures 1 ammeter per circuit Rotating display to ensure a perfect reading whatever the PDU mounting direction is (horizontal, vertical with top or bottom power supply input) IEC 60320 standard 20 C13 outlets + 4 C19 outlets with cord locking system. Connection on terminal block up to 6 mm ²

Energy Distribution

three phase Zero-U Power Distribution Units (PDU)



Technical characteristics p. 17-19

To provide ~ electric power for IT equipments in 19" enclosures
 Three phase 380 V - 50/60 Hz power supply
 Zero-U PDU for vertical mounting in the cabinet (see p. 18-19 for dimensions)
 Each circuit is protected by 16 A single pole MCB in a support with projecting edges to avoid accidental breakdown
 1 circuit per phase, each with 6 IEC 60320 C13 outlets and 2 IEC 60320 C19 outlets
 330° rotating cable input for a perfect orientation of the cable and no interference in the cabinet
 C13 and C19 standard outlets are equipped with cord locking system to avoid any accidental disconnection. Universal solution compatible with all the cords (C14 plugs for C13 and C20 plugs for C19)
 Delivered with 2 sets of metallic mounting brackets:
 - Button brackets. For quick fixing and variable pitch
 - Standard brackets. For screw fixing
 Black modules (outlets and functions)
 Aluminium profile

Pack	Cat.Nos	Standard
1	6 468 70	IEC 60320 standard 18 C13 outlets + 6 C19 outlets with cord locking system. 3 m power supply cord with IEC 60309 32 A 3P+N+E plug
1	6 468 75	With ammeter Measure consumption to provide better installation management: balancing circuits, displaying available capacity, preventing overloads and power failures 1 ammeter per circuit Rotating display to ensure a perfect reading whatever the PDU mounting direction is (horizontal, vertical with top or bottom power supply input) IEC 60320 standard 18 C13 outlets + 6 C19 outlets with cord locking system. 3 m power supply cord with IEC 60309 32 A 3P+N+E plug

Weitere Infos unter +49 (89) 840 57 170 oder auf www.procom-data.de

PROCOM

www.procom-data.de

PROCOM GmbH | Landsberger Strasse 63 | D- 82110 Germering
 Fax: +49 (89) 840 57 171 | E-Mail: info@procom-data.de

Cord locking system p. 17